
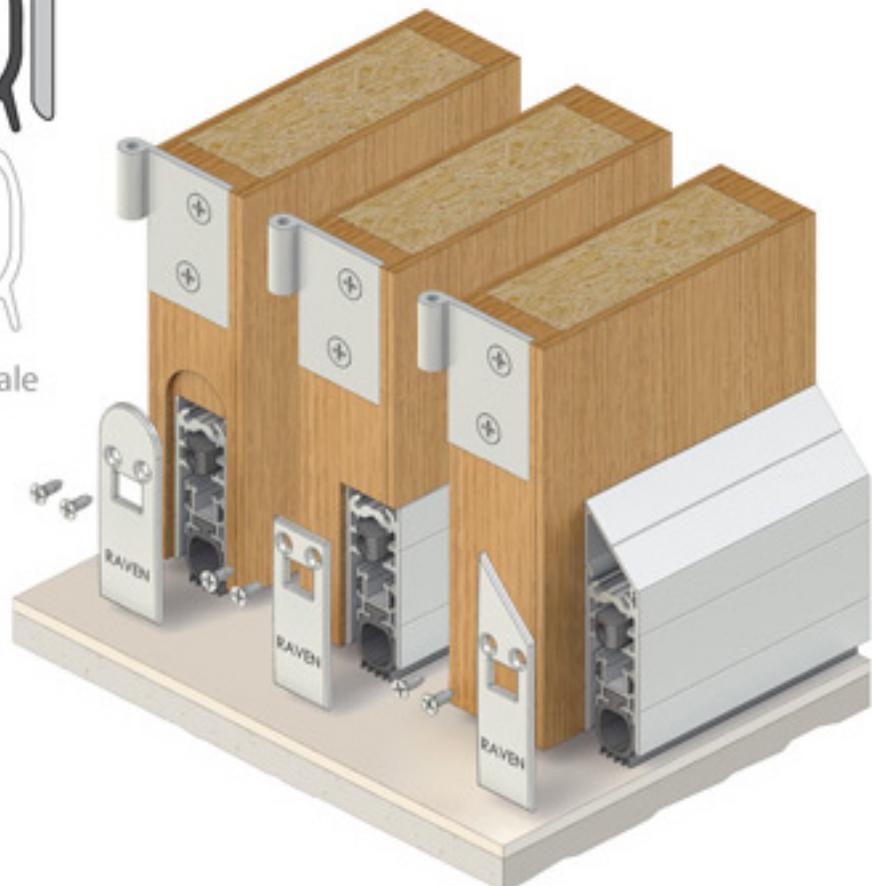


## Raven Door & Fire Seals

Fire Seals, Acoustic Drop Downs, Thesholds

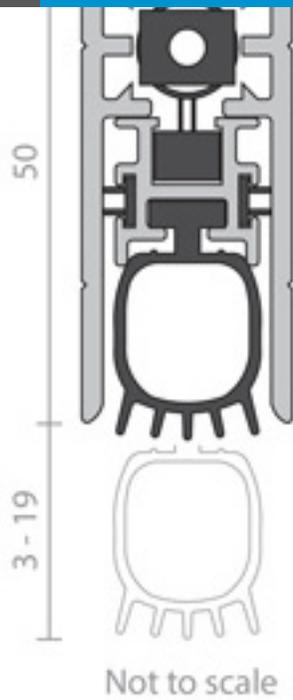

Raven Products offer a range of tested and Certified door and window sealing systems to contain energy, noise, fire and smoke. The range of products is expansive and offer solutions to most building projects. Most products can be sourced and shipped quickly.

The products listed below are just a small sample of the range covering the most popular items.




**RP8si**

A concealed, automatic door bottom seal that is spring loaded to lift clear of the floor when the door is opened. It is acoustically designed, featuring silicon gaskets for medium temperature smoke and fire door applications. Operated automatically by pressure against the door jamb on its adjustable strike. RP8Si can also be fitted into the bottom rail of a metal door by the fabricator. Has a level adjustment to achieve an optimum seal.

Location: Fully morticed into a 15mm x 34mm groove into the bottom of single and double butt hinged timber and metal doors.

Min/Max Gap: 3mm to 13mm.

Length
380mm
600mm
826mm
926mm
1070mm
1220mm





**RP70si**

A heavy duty, fully morticed, automatic door bottom seal that is spring loaded to lift clear of the floor when the door is opened. It is self levelling and reversible for left and right handed operation. Acoustically designed, featuring an EPDM foam gasket for acoustic door applications. RP70 is operated automatically by pressure against the door jamb on its adjustable brass strike.

Location: Fully morticed into the bottom of single and double butt hinged doors (minimum door thickness of 45mm). For double doors, plain meeting stiles are required.

Min/Max Gap: 3mm to 13mm.

Length
450mm
610mm
920mm
1070mm
1220mm
1500mm




**RP99si**

A heavy duty, adjustable, automatic door bottom seal that is spring loaded to lift clear of the floor when the door is opened. Acoustically designed, with a silicon gasket for medium temperature smoke applications. Operated automatically by pressure on the door jamb or stop by its adjustable strike. Includes aluminium cover for concealed fixing for face mounted installation.

Location: Face mounted, semi-morticed or fully morticed into single and double solid core butt hinged doors. Can be fitted into the bottom rail of metal doors by the fabricator. Minimum door thickness of 40mm for semi and fully morticed installations. For double door fully morticed installations, plain meeting stiles required.

Min/Max Gap: 3mm to 19mm.

Length
380mm
600mm
720mm
820mm
920mm
1070mm
1220mm




**RP60si**

An adjustable, automatic door bottom seal which is spring loaded to lift clear of the floor when the door is opened. Operated automatically by pressure against the door stop on its adjusting screw and incorporates concealed fixings. The RP60 is self levelling and can be used in conjunction with Raven threshold plates such as the RP13 and RP82.

Location: Face mounted on the bottom of single and double butt hinged doors.

Min/Max Gap: 3mm to 15mm.

Length
920mm



**RP62 Heavy Duty Finger Guard**

A safety strip which prevents fingers being jammed on the hinge side of a door. It is fixed to the door and the jamb on the hinged side.


Ideal choice for heavy duty commercial applications, schools and hospitals.

Sizes: 2100mm.



Item	Length
RP62	2100mm
RP62LC	2100mm

Specify BLACK or WHITE when ordering

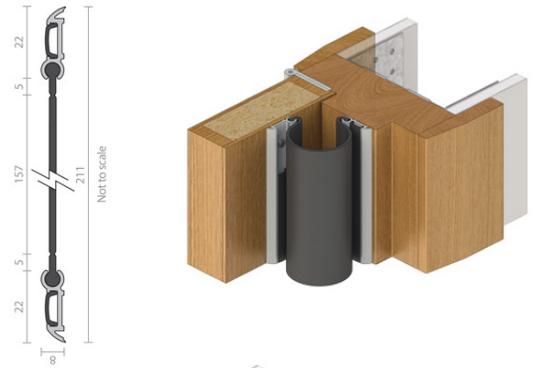

**RP120 Delta Seal**


RP120 is a co-extruded PVC acoustic smoke seal that is discreetly located in the protected corners of rebated timber or steel door and window frames. RP120 is now available in white as well as black to blend in with frames and is suitable for both new and retrofit projects.

Can be used in conjunction with Raven door bottom seals and astragals and threshold plates.



Length
Kit 2x2.1 + 1 x 1m
Kit 3x2.1m

Specify BLACK or WHITE when ordering

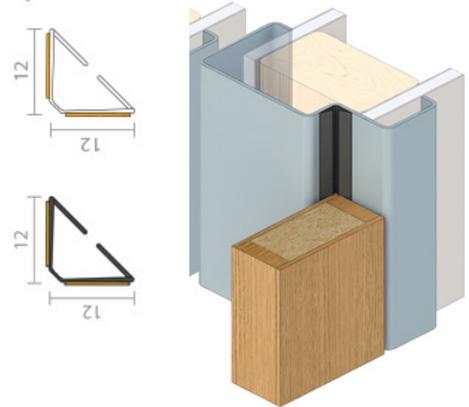


**RP13 25mm Threshold Plate**

A low profile threshold plate that is ideal for use in conjunction with Raven door bottom seals to prevent rain, draughts, noise and smoke infiltration.



Length
1000mm
2000mm
3000mm




**RP82 40mm Threshold Plate**

A low profile threshold plate that is ideal for use in conjunction with Raven door bottom seals to prevent rain, draughts, noise and smoke infiltration.



Length
1000mm
2000mm
3000mm




**RP77 100mm Threshold Ramp Plate**

A heavy duty threshold ramp with a ribbed design which can be positioned back to back to form a two way threshold ramp.



Length
1000mm
2250mm
3000mm

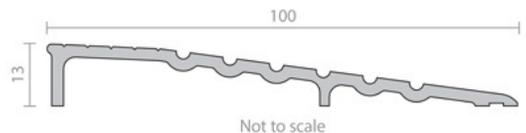

For more information and technical data sheet for the full range of Raven Product please call the office or visit.

[WWW.RAVEN.AU](http://WWW.RAVEN.AU)

For Pre-Pack options for your stores please call to discuss what we can offer.

